

Model Information



■ Main Features

- Consists of [1xNetCom Plus 813](#) and [1xUSB-8COM Plus](#)
- Ethernet to serial 16 port RS232/422/485
- Virtual Com Port driver for Windows
- Secure Server with latest SSL/AES-256 encryption
- Operation in Driver Mode, TCP/IP and many other
- Quick Configuration over Driver and Browser
- ESD protection on serial ports, Ethernet, DC power
- 19"Rack and Wall mount options
- Optional: Wireless network IEEE 802.11b/g/n
- Optional: 3G/4G Modem for mobile networks


[Contact Online...](#)

NetCom Plus 1613

(NetCom 1611RM PRO, NetCom 1613RM PRO)

Quick Link: | [Main Features](#) | [More Pictures](#) | [Overview](#) | [Ethernet Interface](#) | [Serial Interface](#) | [Software](#) | [Installation & Configuration](#) | [Security](#) | [viaVPN Remote Access \(option\)](#) | [Wireless interface \(option\)](#) | [3G/4G Modem Interface \(option\)](#) | [Power Requirements](#) | [Housing and Mounting](#) | [Environmental Data](#) | [Standards](#) | [MTBF \(Mean Time Between Failures\)](#) | [Warranty](#) | [Ordering Information](#) | [Options](#) | [Packaging](#) |

■ More Pictures

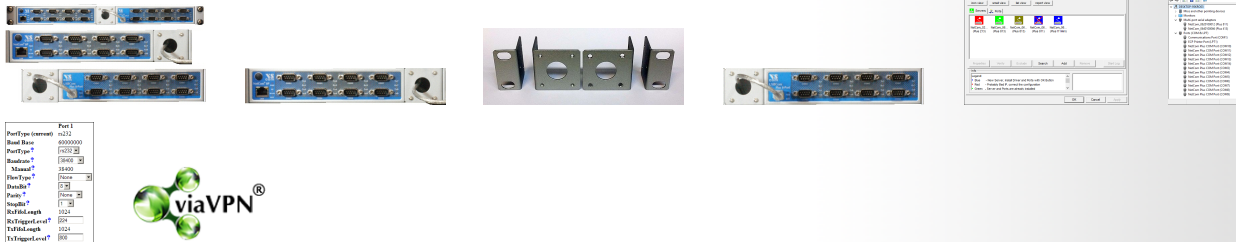

Click on the thumbnails for the large picture ...

[>Back to top](#)

■ Overview

The Ethernet to Serial Gateways NetCom Plus connect RS232 or RS485 devices to a network running TCP/IP. These Serial Device Servers are rugged industrial devices with metal case and wall or 19"-Rack mounting, further supported by ESD protection on serial ports, power input and USB. The NetCom+ 1613 provides sixteen RS232/422/485 ports.

Windows Driver installs Com Ports

The driver for Windows operating system installs Virtual Com Ports. These operate in the same way as built-in ports, but via Ethernet or optional WLAN 802.11b/g/n. Easy-to-use Installation and Management software guides users through the configuration.

High Speed Serial Ports, Low Power

The serial ports allow data rates of up to 12Mbps in RS422/485 or 1000kbps in RS232 modes. The ports also allow every non-standard bitrate up to 3.5Mbps, and many more (e.g. 5Mbps). See [FAQ](#). The NetCom+ 1613 demonstrates the Expansion of serial ports by already including a USB-8COM Plus device and a side-by-side mounting kit. The combined gateway demands 9W of power or less. The flexible input allows for various sources of customers choice.

Easy Configuration, versatile Operation Modes

NetCom+ are configured over Driver Panels and WEB Browser. This is also possible via serial Port, Telnet or SNMP. NetCom+ provide Driver Mode, TCP/IP or UDP connection, and many operation modes beyond those.

Secure Remote Access for Monitoring

For NetCom Plus series there is a software option using the viaVPN Cloud system (www.viaVPN.com) to be remotely accessed and monitored over Internet. viaVPN provides secure and strongly encrypted access, without any reconfiguration of existing firewalls. The access to the firmware via Ethernet or WLAN is extended by viaVPN over Internet, protected by a VPN tunnel. If the Com ports are not occupied by local access, also remote operation over Internet is possible.

■ Ethernet Interface

Speed/Type	100Mbps/10Mbps Auto-detecting
Connector	RJ45 (8P8C) 8 pin
LEDs	Power, WLAN, Ready, Ethernet Link / Speed

[>Back to top](#)

■ Serial Interface

No. of Ports/Type	16 × RS232/422/485 selected by DIP-switch or software
Connector	DB-9 male
Protection	16kV ESD surge protection
Operating Modes	<ul style="list-style-type: none">• RS232• RS422 full duplex (120Ω on/off)• RS485 4 wire, full duplex (120Ω on/off)• RS485 2 wire, half duplex (120Ω on/off)
Configuration	One DIP switch sets operating mode and RS422/485 termination Software can configure the ports individually No High/Low biasing resistors needed
Signals	<ul style="list-style-type: none">• RS232: TxD,RxD, RTS,CTS, DTR,DSR, DCD, GND• RS422: Tx+/-, Rx+/-, GND• RS485 4 wire: Tx+/-, Rx+/-, GND• RS485 2 wire: Data+/-, GND
RS485 Data Direction Control	ARTc (Automatic Receive Transmit control)
Data bits	7, 8
Stop bits	1, 2
Parity	None, Even, Odd, Mark, Space
Flow Control	RTS/CTS, XON/XOFF
Baudrate	<ul style="list-style-type: none">• RS232: 180bps - 921.6/1000kbps• RS422: up to 12Mbps• RS485: up to 12Mbps Supports non-standard baudrates
LEDs	TxD/RxD for each port

[>Back to top](#)

■ Software

Network Protocols	TCP, UDP, Telnet, PPP, DHCP, ICMP, UPnP, HTTP, LPD, SNMP V1/2c/3, DNS, openVPN
Virtual-COM Mode	Driver creates virtual COM ports via NetCom protocol © for Windows XP/7/8/10, Win-Server 2003 to 2008 R2 (x86/x64)
Socket Modes	TCP RAW Server, TCP RAW Client, UDP Mode, Print Server Automatic switching between Virtual-COM and TCP-RAW Server modes.
Tunnel Modes	Null Modem Tunnel and IP Modem
Fixed TTY Drivers	socat Tool, Linux OS

[>Back to top](#)

■ Installation & Configuration

Installation	NetCom Plus Manager automatically finds NetCom Plus devices in the local network.
---------------------	---

UPnP	With Network discovery enabled NetCom Plus servers announce their presence via UPnP making their IP visible.
Configuration	via WEB-Browser, Driver Panels, NetCom Manager, serial console, Telnet console or SNMP
Firewall	Virtual-COM mode works through firewalls
Firmware Update	via WEB Browser
>Back to top	
■ Security	
Password Protection	for all available configuration options e.g. via WEB-Browser
Secure Server	create openVPN™ tunnels, for encrypted transmission of all serial and configuration data using high security SSL/TLS standards.
>Back to top	
■ viaVPN Remote Access (option)	
Connect via Internet	viaVPN technology provides easy and secure access to remotely installed NetCom Plus servers for their configuration or for connecting their virtual COM ports through Internet. With the viaVPN option the NetCom Plus servers are no more limited to only work inside of a local network.
Security	All communications use openVPN-tunnels encrypted by SSL/TLS and AES-256 standards.
Firewall friendly	No Reconfiguration of firewalls is required for viaVPN remote access.
>Back to top	
■ Wireless interface (option)	
Standards	2.4GHz Radio, supports IEEE Std. 802.11b/g/n
WLAN Modes	Access Point (AP) or Client (Station)
TX Power	802.11b: Typ. 15.5dBm ±1.5 dBm @ 1Mbps (DSSS) Typ. 15.5dBm ±1.5 dBm @ 11Mbps (OFDM) 802.11g: Typ. 15.6dBm ±1.5 dBm @ 6Mbps (CCK) Typ. 13.5dBm ±1.5 dBm @ 54Mbps (OFDM) 802.11n: Typ. 13.4dBm ±1.5 dBm @ 6.5Mbps (OFDM) Typ. 13.3dBm ±1.5 dBm @ 150 Mbps(OFDM)
RX Sensitivity	802.11b: -95.6dBm @ 1Mbps, -88dBm @ 11Mbps 802.11g: -91.3dBm @ 6Mbps, -74.2dBm @ 54 Mbps 802.11n: -88.8dBm @ 6.5Mbps (20 MHz), -72dBm @ 72.2Mbps (20 MHz)
Transmission Rate	802.11b: 11Mbps 802.11g: 6 to 54Mbps 802.11n: 6.5 to 150Mbps
Transmission Distance	Up to 100m in open areas
Wireless security	<ul style="list-style-type: none"> • WEP • WPA • WPA2 • WPA2-Enterprise (IEEE 802.1X/RADIUS)
Antenna Connector	RP (Reverse-Polarity) SMA
>Back to top	
■ 3G/4G Modem Interface (option)	

mPCIe Slot	Built-in internal Mini PCI Express Slot connected to USB 2.0 HS 3.3V at mPCIe slot is switched ON/OFF via firmware to securely reset 3G/4G modems
SIM Slot	Built-in internal SIM Card slot
3G/4G Modems	Different 3G/4G Modem models are supported by NetCom Plus firmware

[>Back to top](#)

■ Power Requirements

Input Voltage	9 - 54V DC
Power Consumption	0.4A @ 12V, 5W max 0.8A @ 12V, 9W max when USB-8COM Plus is supplied via USB
Connector	3-pin Terminal Block

[>Back to top](#)

■ Housing and Mounting

Case	0.8mm sheet metal
Weight	w/o box 1.9kg; w/h box 2.8kg
Dimensions	437×147×44 mm ³ (W×L×H)
Packaged	310×192×120 mm ³
Mounting	19-inch Rack

[>Back to top](#)

■ Environmental Data

Operating Temp	-20°C - 65°C
Storage Temp	-20°C - 85°C
Ambient Humidity	5-95% non condensing

[>Back to top](#)

■ Standards

Declarations	CE, FCC
EMI	<ul style="list-style-type: none"> • EN 55022 Class B • EN 61000-3-2: Limits of harmonic current emissions • EN 61000-3-3: Limitation of voltage changes • 47 CFR FCC Part 15 Subpart B
EMS (EN 55024)	<ul style="list-style-type: none"> • EN 61000-4-3: Radiated RFI • EN 61000-4-4: Electrical Fast Transient • EN 61000-4-5: Surge • EN 61000-4-6: Induced RFI • EN 61000-4-8: Power Frequency Magnetic Field • EN 61000-4-11: Power supply dips
ESD	EN 61000-4-2 4kV contact 8kV air for <ul style="list-style-type: none"> • Serial Ports • USB • Ethernet • DC Power connector

[>Back to top](#)

■ MTBF (Mean Time Between Failures)

MTBF	16.8 Years @ 25°C 7.5 Years @ 45°C
Standard	Telcordia (Bellcore) Standard; RelCalc. 5.0 BELL-7

[>Back to top](#)

■ Warranty

Warranty Period	2 years
------------------------	---------

[>Back to top](#)

■ Ordering Information

6685 NetCom Plus 813 (8x RS232/422/485, expandable)
 6694 RK-NCP
 612 USB-8COM Plus (8x RS232/422/485, expandable)

[>Back to top](#)

■ Options

6031 Power adapter 110-230V AC to 12V @1A, DC, EU plug
 6034 Power adapter 110-230V AC to 12V @1A, DC, US plug
 6679 Activate option [viaVPN](#) for secure remote access over Internet
 6689 WLAN Kit internal
 internal module 802.11b/g/n, pigtail and antenna
 Purchase time option, not for later retrofitting
 3304 3G-Modem GSM/UMTS/HSDPA for mPCIe incl. IPEX cable & SMA Antenna
 663 DB9F-to-TB/5Pins for free wiring option
 6061 DB9F-to-RJ45 for changing from DB9 to CAT5 wiring
 (Optimised for RS422/485 operating modes)
 6062 RJ45-to-DB9M for changing back from CAT5 to DB9 wiring
 (Required to match the DB9 pinout at NetCom Plus)
 661 Serial Null-Modem adapter 9PF-9PF, change male to female

[>Back to top](#)

■ Packaging

Packing list

- NetCom Plus Serial Device Server
- Terminal block for Power Supply
- 19-inch Rack Mounting brackets
- Wall mounting kit

[>Back to top](#)

* Specifications are subject to change without notice.
 * All trademarks and brands are property of their rightful owners.

NetCom Plus 1613

[>Back](#)



NetCom Plus 1613 Left Part is NetCom Plus 813

[>Back](#)



RK-NCP

[>Back](#)




NetCom Plus 1613 Right Part is USB-8COM Plus

[>Back](#)




NetCom Plus Manager

[>Back](#)

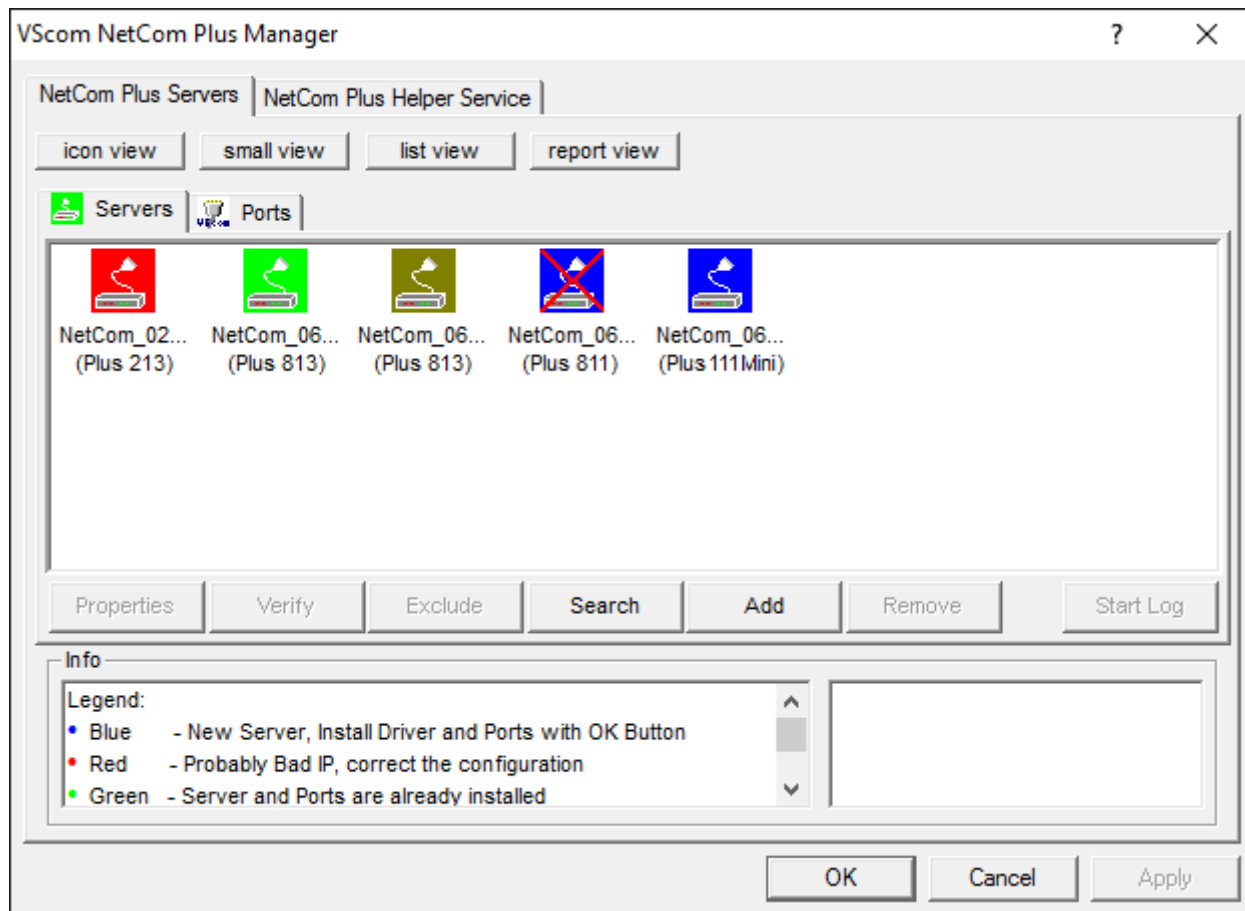

NetCom Plus in Device Manager

[>Back](#)

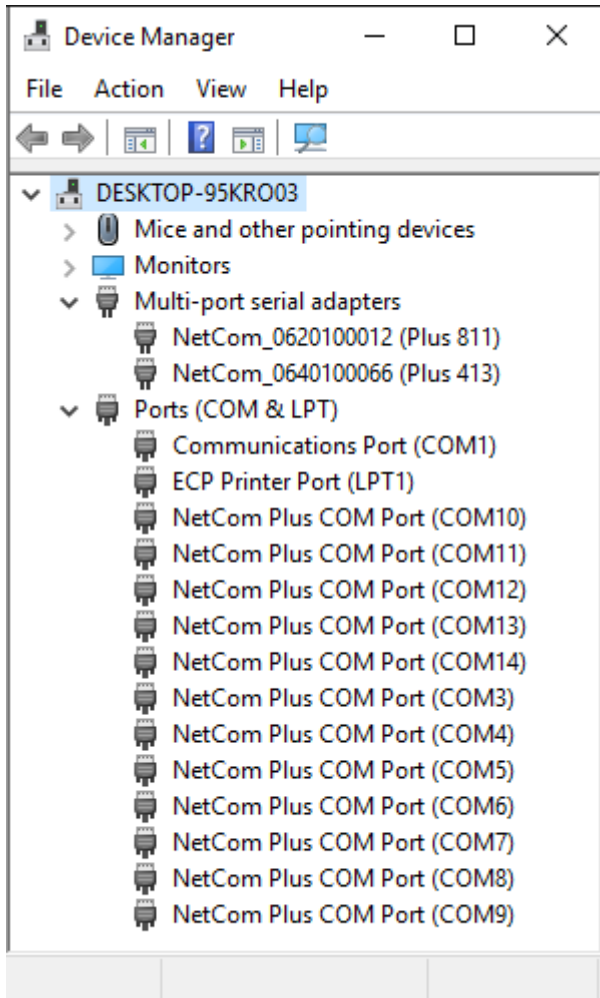

Serial Port in Web Interface

[>Back](#)

	Port 1
PortType (current)	rs232
Baud Base	60000000
PortType ?	<input type="text" value="rs232"/>
Baudrate ?	<input type="text" value="38400"/>
Manual ?	38400
FlowType ?	<input type="text" value="None"/>
DataBit ?	<input type="text" value="8"/>
Parity ?	<input type="text" value="None"/>
StopBit ?	<input type="text" value="1"/>
RxFifoLength	1024
RxTriggerLevel ?	<input type="text" value="224"/>
TxFifoLength	1024
TxTriggerLevel ?	<input type="text" value="800"/>

Remote Access option

[>Back](#)



(2018 Jan 17)